

OWL Series


2MP-5500XN

HIGH SPEED PTZ DOME CAMERA



FEATURES

- 1/4" SONY EXview HAD CCD
- 36X / 27X / 22X Optical Zoom and 12X Digital Zoom
- 360° Continuous Pan Rotation
- OSD Menu
- IP 66 Waterproof
- RS-485 Multiple Protocols
- (Optional) In-Ceiling Mount

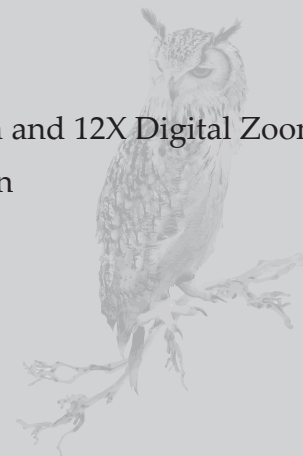

ITEM	2MP-5522XNW	2MP-5527XNW	2MP-5536XNW
Sensor	1/4" SONY ExView HAD CCD	1/4" SONY ExView HAD CCD	1/4" SONY ExView HAD CCD
Horizontal Resolution	550 TV Lines	550 TV Lines	550 TV Lines
Camera	Sony	Sony	Sony
Focus Length	F4.1mm ~ 73.8mm	F3.5mm ~ 91.0mm	F3.4mm ~ 122.4mm
Optical Zoom	22X	27X	36X
Digital Zoom	12X	12X	12X
Minimum ill.	0.1 Lux D / 0.001 Lux N	1.0 Lux D / 1.05 Lux N	1.4 Lux D / 0.01 Lux N
Iris	Auto/Manual		
S/N Ratio	>50dB		
Privacy Zone Mask	Auto/Manual, 8 masks per view		
Baud Rate	2400/4800/9600BPS		
Power supply	AC24V ± 10%		
Power Consumption	Indoor: 10W Outdoor: 25W		
Manual Speed	0.05° ~ 600°		
Preset Speed	600° / S		
Pan Angle	360° continuous pan rotation		
Tilt Angle	-8° ~ 90°		
Presets	220		
Preset Accuracy	± 0.1		
Data Communication	RS-485		
OSD Menu	Support		
Protocol Self Adapt.	Support		
Operating Temp.	Indoor: 0°C ~ +50°C Outdoor: -35°C ~ +55°C		

550 TV LINES

0.1 LUX

IR LED

VARIFOCAL LENS

PAN/TILT

Optional In-Ceiling Mount Models

- 2MP-5822XNC
- 2MP-5827XNC
- 2MP-5836XNC